


American Models GG-1 LocoMatic™ Type3 Installation




To mount sound unit you must remove the 1/8" double sided tape and mount board flush to the roof top. Also remove the one 2200mfd capacitor, as shown, to obtain clearance for the drive box stud (or remove the stud). Study the pictures for wire, lamps, sw/vol, and speaker placement.

Headlights were mounted using a brass tube as a shroud. The sw/vol board was mounted with double sided tape placed on the front side of the board and then made black with a marker. Carefully fold the gray flat wire to fit.

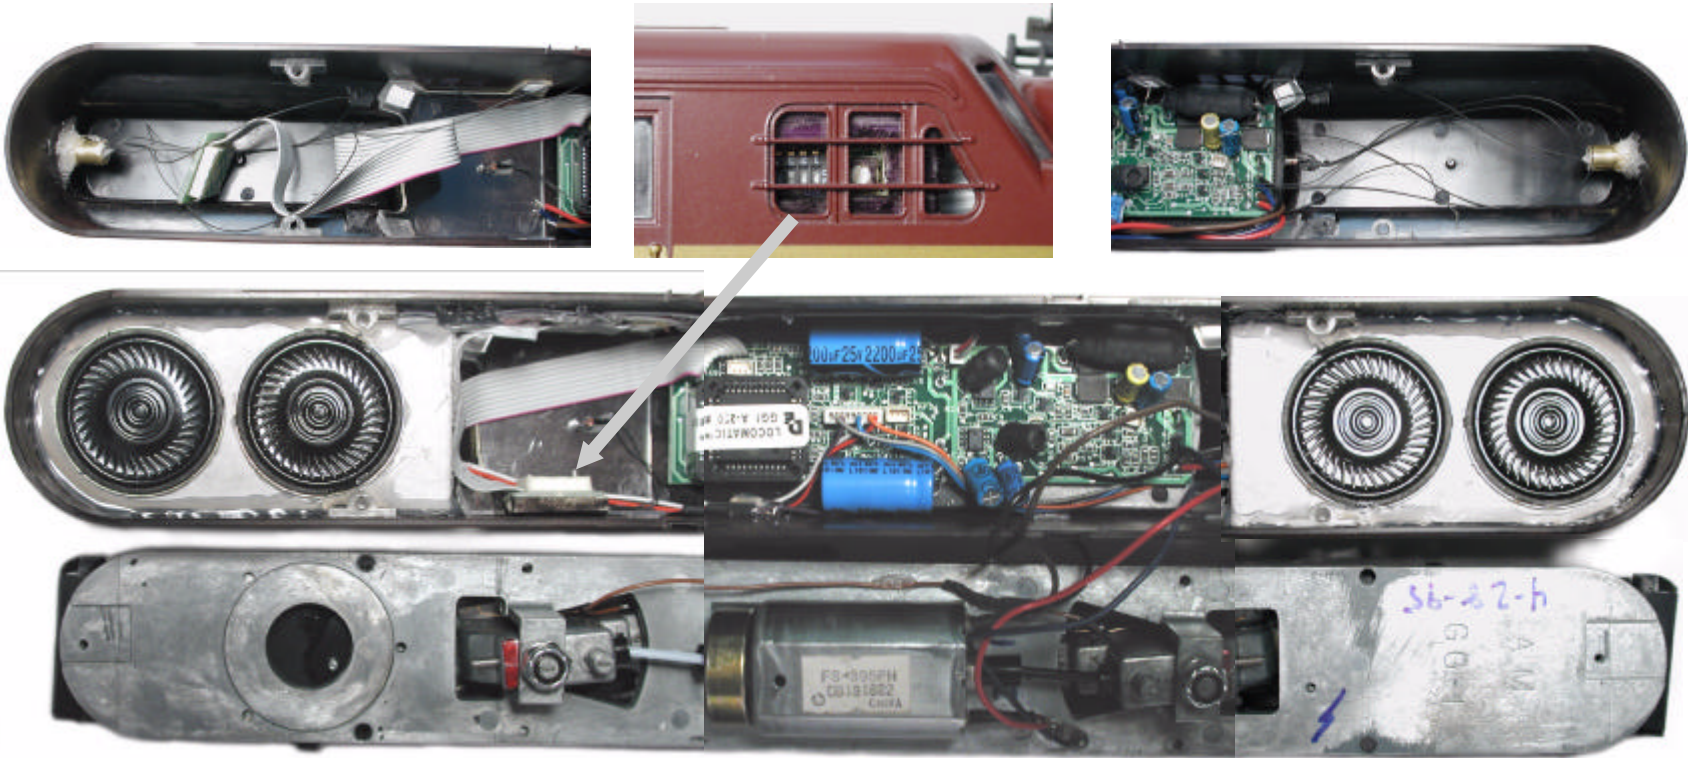


change motor mount to 1/16" thick tape.

Use the cutout templates below for speaker mounting. Copy them and glue onto a stiff cardboard. Cut out the speaker circles. Fold on the gray line. Mount the speakers with a glue. Secure the entire unit inside the shell completely sealing the edges as shown. Hot Melt was used for the installation.

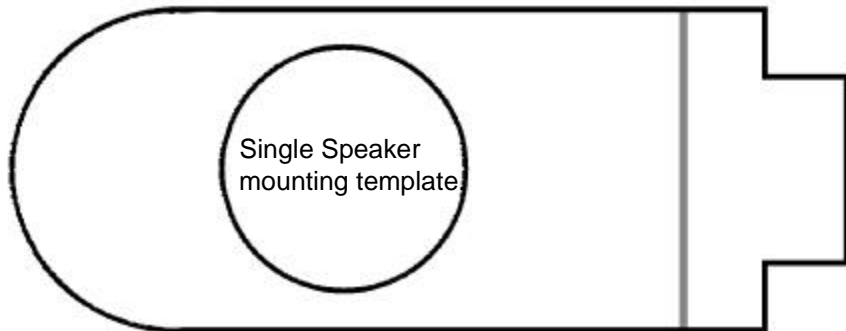

Single Speaker mounting template.

When installing four 1.5" speakers (item #661) wire in series parallel as shown in the speaker insert. For two 1.5" speakers, wire them in series. Observe the speaker polarity in all cases!

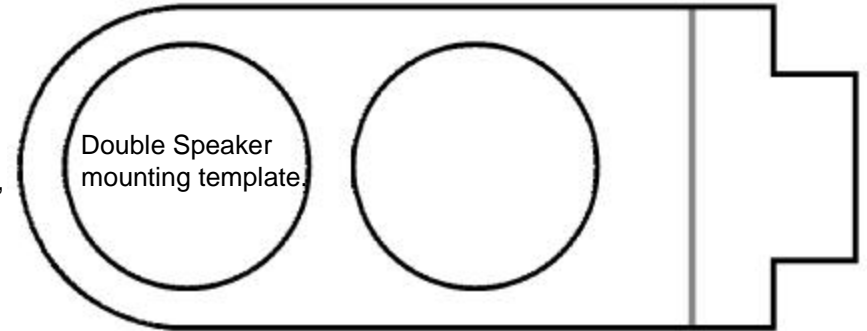

Double Speaker mounting template.