



# 9vBRLT - AFL Northern Installation

by using the 9vBRLT, a battery is not required in this locomotive! Plus, you only have to open your tender up one time for installation instead of many for battery replacement.

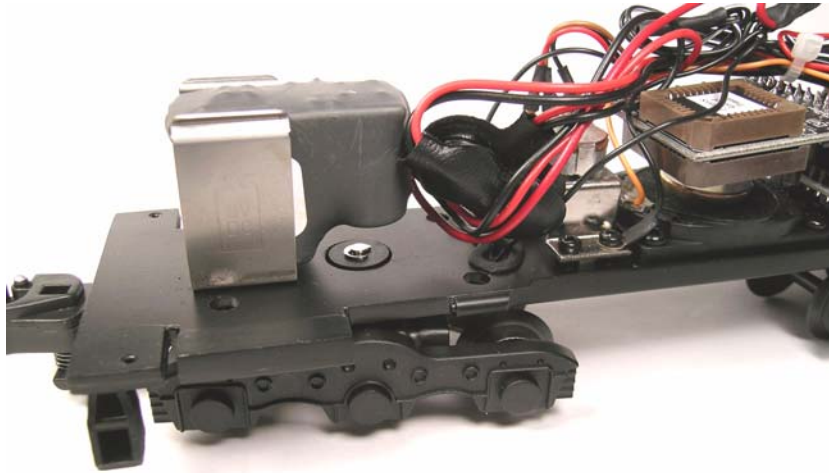

**Side view.**

Connect the battery snaps together. Make sure they do not short to the chassis or any other metal object. Second, connect the RED wire to the right rail pickup. Either secure the 9vBRLT to the battery holder or in front of it. There is plenty of room!

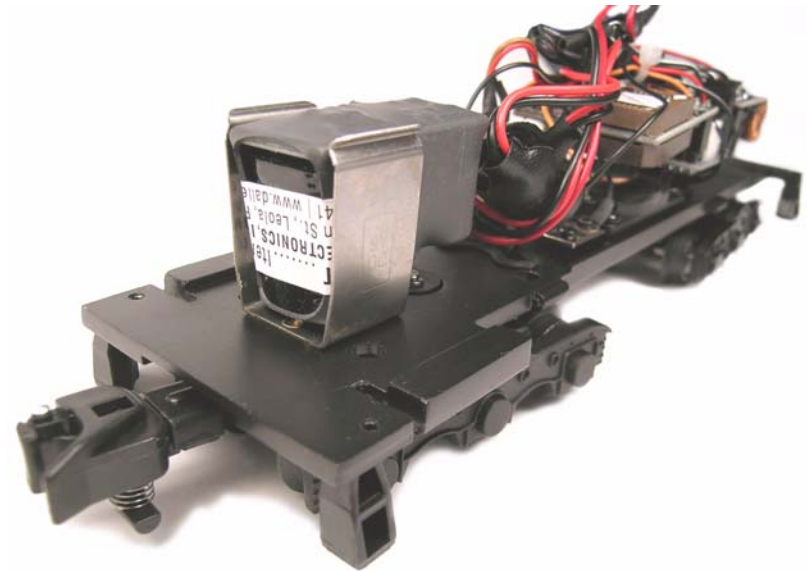

**9vBRLT, installed upside down. Spread battery bracket slightly at it's base to allow for a snug fit. Don't spread too much or the tender shell will not clear.**

Item #598, 9vBRLT  
\$29.95\*

**DALLEE**  
ELECTRONICS, Inc.

est. 1976  
[www.dallee.com](http://www.dallee.com)

From your **D<sub>E</sub>** DEALER or DIRECT

Dept S, 246 W. Main St., Leola, PA 17540

\*All direct orders (U.S.) require  
+ \$9.25 s/i (PA res + 6% s/s tax) prices  
subject to change w/o notice. 10/06

ph/fx:(717) 661-7041