

Announcing.....

New, super small, Electronic E-Unit for DC motors. Plus a 33% size reduction of our standard universal Electronic "E" Unit!

The Electronic "E" Unit provides direction sequencing of locomotives that are designed to operate with AC track power. Our Electronic "E" Unit provides the user with greater control at slower speeds since it is completely solid state! There are no relays to activate or drums to turn yielding positive control with power engaged to the motor at very minimal track voltage.


Electronic "E" Unit, #400, replaces all other "E" units.

These Electronic "E" Unit's are designed to provide sequential direction control for the later locomotives with permanent magnet DC motors. Item #400 will also power earlier series wound field type motors. Item #400 has a continuous duty capacity of four (4) amperes of current flow, sufficient for most dual motored locomotives. Item #518 is limited to one (1) ampere and is intended for smaller locomotives with single motors. While most operators will use AC track power, this "E" unit will also sequence with DC track power. The initial "power on" state is user selectable so you can decide if you want the locomotive to start in either FORWARD or NEUTRAL. Provision is made so that a switch (not supplied) can be installed to lock the "E" unit in its initial state. Lock in FORWARD for automation applications or lock in NEUTRAL to allow sound systems to function with a static locomotive. If power is off for approximately 6 seconds, the "E" unit will reset to its initial "power on" position. The "E" unit was also designed for easy installation of accessory items such as lighting. Many lighting variations are possible and easy to incorporate because of the design of this "E" unit. Complete installation instructions with lighting variations is included with the unit. As with all of our AC product line, this unit is compatible with all types of acceptable AC track power. These newer units offer superior operation over previous units.

#400 E-Unit

4 ampere capacity for AC and DC motors

0.95" w x 1.95" l x 1" h at one end
the rest is less than 1/2"

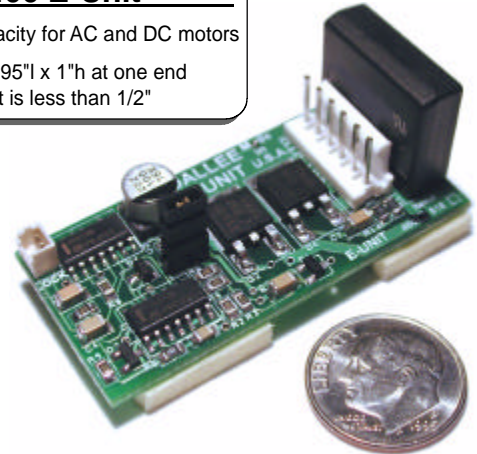


(shown without supplied mating connectors with wires)

#518 E-Unit

1 ampere capacity for DC motors

0.95" w x 1.95" l x 0.4" h
(0.5" at jumper select)

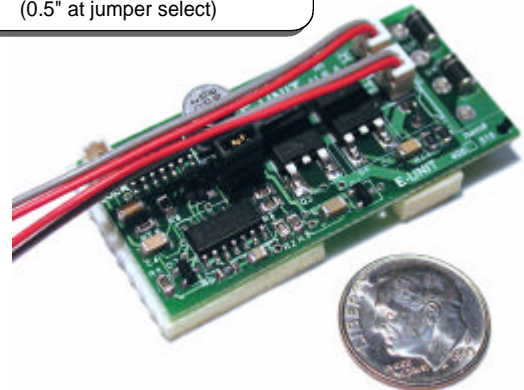

(shown with supplied mating connectors with wires for motor and power input)

We sell to qualified dealers and direct.

* all direct orders require PA State sales tax if applicable and a shipping / handling / insurance charge (typically \$9.25). Call for total pricing.

DALLEE ELECTRONICS, Inc.

246 W. Main Street
Leola, PA 17540
Ph: (717) 661-7041
Fx: (717) 661-7042
www.dallee.com

Since 1976

April 1, 2003