

CAUTION: this device can be damaged by static discharge. Please exercise care during installation to avoid this possibility. Discharge yourself to an electrical ground (outlet cover screw) before removing this device from its anti-static bag. Please read instruction sheet completely before attempting to install and operate this product. Save the anti-static bag for possible reuse of storing or shipping the sound unit!

OVERVIEW: This device is an electronic, self contained, sound system for installation in model electric Trolleys that are designed to operate with conventional DC track power or other types of command control systems including radio receivers with either track or battery power, also as a stationary sound unit. Because of its dimensions (2.7" x 0.9" x approx. 0.5" high) the sound system may be limited to installations in some powered units making the need for use of a "dummy" unit or a trailing car. This unit differs from the standard DC type sound systems in that it contains automatic Horn play patterns each time the input is triggered. Triggering the play patterns is done by the use of a reed switch passing a fixed magnet. The Bell is also triggered on and off in the same manner. Large gauge "G" operators usually place the reed switch beneath the locomotive. One side is used for the Horn, the other side for the Bell. Magnet trips are then placed in the track. Another method of operation is to operate the sound system as a stationary unit and place the magnets on the underside of an engine or car.

An on/off switch (not included) must be used to power the sound unit on and off in some applications. The audio amplifier can produce 1.1 watts of power which is in excess of what most small speakers can handle. The speaker impedance must be 8 ohms or higher. Sound volume is adjustable. Refer to our catalog for available speakers. It is always advisable to use the largest speaker possible. See our web site or catalog for choices available.

An on/off switch (not included) must be used to power the sound unit on and off in some applications. The audio amplifier can produce 1.1 watt of power which is in excess of what most small speakers can handle. If more audio power is desired, an amplifier such as item #672 can be used. The speaker impedance must be 8 ohms or higher. Sound volume is adjustable. Refer to our catalog for available speakers. Always try to use the largest size speaker for the space allotted or multiple cluster's of four smaller speakers also works well.

Sounds produced include horn, bell, door sound, and rail traveling sound. Air Compressor sounds are only in the "Later Type" trolley system (item #985).

INSTALLATION INSTRUCTIONS: The sound system consists of a printed circuit board, a speaker, five 2-pin connectors with wires and one 3-pin connectors with wires. Refer to the drawing on page 2 to familiarize yourself with the connectors and controls on the sound board. Then refer to the specific instruction sheets for the type of installation you intend to make. Before proceeding with the installation read the balance of the instructions carefully so you will be completely familiar with what is required and what sounds you should hear.

The circuit board should be mounted so that at minimum, the volume control is accessible either through the frame or via a hatch or a hole in the locomotive body shell. Be certain that the components on the circuit board do not come in contact with any metal objects as such contact can destroy the sound system. The speaker should be mounted as per available space bearing in mind that sound reproduction is enhanced when a speaker is properly enclosed and baffled.

If a DC powered trolley is not moving, there is no track power, therefore to have sound it is necessary to have a separate power supply for the sound system. For in locomotive use, this separate supply is a battery. We suggest the use of one 9 volt or 6 AA or 6 AAA batteries in series to maximize volume potential and battery life. Rechargeable batteries can be used. When connecting the battery (DC) power leads be absolutely certain that wires connect to the proper DC input leads.

Installation of the reed switches is easily done by making the appropriate wire connections and placing the reed switch in the proper location for magnet activation. When removing the reed switches, be careful not to crack the glass. Do not bend the leads at the glass ends, use a needle nose pliers to hold the wire entering the glass and then bend the wire. Bending at the glass will break or deform the alignment of the reed switch. Carefully solder wires and cut excess lead ends. Reed switches are not warranted under any circumstance since they are quite fragile and easily broken physically and electrically. Extra reed switches are available, item 989. After appropriate lengths of wire are placed on the reed switch, secure the reed switch with either double sided tape (item 388) or other type of glue. Make sure that all wires to the reed switches and sound system do not come into contact with any other metal or power wire since this may damage the sound system.

If any connections are not done properly, especially the power connections, you will damage the sound system. This type of damage is not covered under any warranty. The sound system is thoroughly tested and inspected before packing to insure proper function. There is a minimum charge of \$40.00 plus s/h for repair.

SOUND INFORMATION: All sounds are discussed assuming that the sound unit is fully powered at all times. If only powered from track power, the sounds will only start when sufficient track voltage is obtained.

TRAVELING: sounds range from no sound when stopped to full speed based upon motor voltage present and the "Notch" control setting. The traveling sounds default to sectional rail. You can select welded rail by merely connecting J5, pin 1 (red wire) to the ground connection (J2, pin 2, gray) as shown on pg 5.

DOOR SOUNDS: close sound is produced when the sound unit is first powered up and when the throttle is advanced from the 0 voltage position. For DC operators, this requires approximately 1.5 to 2 volts of motor voltage to sense a running mode (J3 input). Opening sound is produced a few seconds after the trolley has come to a stop with 0 motor voltage. For those without doors on their trollies, the door sound can be made not to play by connecting J5, pin 2 (gray wire) to the ground connection (J2, pin 2, gray) as shown on pg 5.

HORN: sound is controlled by the reed switch trigger. Upon closure of the reed switch via an external magnet, the sound system will begin to play appropriate Horn patterns. Each activation will trigger a different Horn signal (play pattern).

BELL: sound is controlled by the reed switch trigger. When BELL sound is activated while running, it will start a bit after the Trolley has stopped and is sitting at rest. It operates the BELL in a slow fashion to represent the motor man activating it. The bell will automatically turn off if the trolley starts to move. It also automatically rings two times before the traveling sounds occur. If the door sound is on, the door will close just before the bell is rung. The bell sound may have a delay until it starts to ring after activation.

AIR COMPRESSOR: runs at random in the "Later Type" trolley system. "Early Type" systems do not have air compressor's.

SPEAKER MOUNTING: The speaker generally should be mounted so that the sound can actually "get out" of the locomotive. A hole in the floor or fuel tank is acceptable but open grills or a doorway may be a better choice as the sound can exit upward rather than down toward the track. In some cases, particularly with plastic body shells, just mounting the speaker against the shell will be adequate as the vibrations of the shell can enhance the sound. Enclosing the speaker in a chamber will also enhance sound reproduction. A very simple enclosure can be made with a tube. The longer the tube, the better the speaker will reproduce low frequency sound which is inherent in diesel prime movers. It is usually best to seal the tube so there are no air passages to the rear of the speaker, thus creating a sound chamber. By carefully sealing all openings it may be possible to use the entire body shell as a sound chamber. A simple wall

behind the speaker may be all that is possible or perhaps all that is needed.

Speakers can be attached with double sided tape, glue or with "hot melt". Enclosures can be made with plastic, wood, card stock or even metal. Film cans or medicine bottles make excellent sound chamber enclosures for small diameter speakers. Stiff items are best. Attachment with "hot melt" is advantageous as the "hot melt" can be used as a gap filler when creating an enclosure.

A second speaker, wired in series with the main speaker, can also enhance sound quality and will permit a higher volume without damage to the individual speakers. A tube with a speaker at each end or a speaker in a doorway at each end of a body shell is an excellent approach. A four speaker approach will yield the highest volume while still maintaining the 8 ohm minimum requirement. Drawings for this are included in the speaker instructions.

Speaker enclosure is an art and experimentation is definitely in order for your installation so as to gain the maximum benefit of the superb sound quality available in this sound system.


GENERAL OPERATING INFORMATION:

VOLUME ADJUSTMENT: should be set as desired for your application. Please remember that the amplifier can produce more power than a small speaker can handle and that the sound will be louder if the speaker is properly enclosed and baffled. If you are using batteries, the louder the volume the shorter the battery life.

NOTCH ADJUSTMENT: this control adjusts the sensitivity range for the traveling sounds. Full clockwise will produce the fastest traveling sounds at approximately 8 volts to the motor, J3 input. Rotate the control CCW to increase the voltage required. Gauge 1 and other operators using higher motor voltages will probably want to set this control full CCW.

Radio receiver operators desiring manual horn plays require the standard DCv3 sound unit. Not the "Auto-Horn", "Auto-Whistle" type. The "Auto" types all start with a 9 for their item number. They are also highlighted in the price schedule page by orange text, DCv3's in blue.

Remember, most everything in this trolley sound unit is automatic. The Horn, if your trolley had any, and manual play of the bell are not. If neither of these are required and you want rail clicks with operating door sounds, then you don't have to connect anything to J4 or J5 since this is the default playing mode of this sound unit.

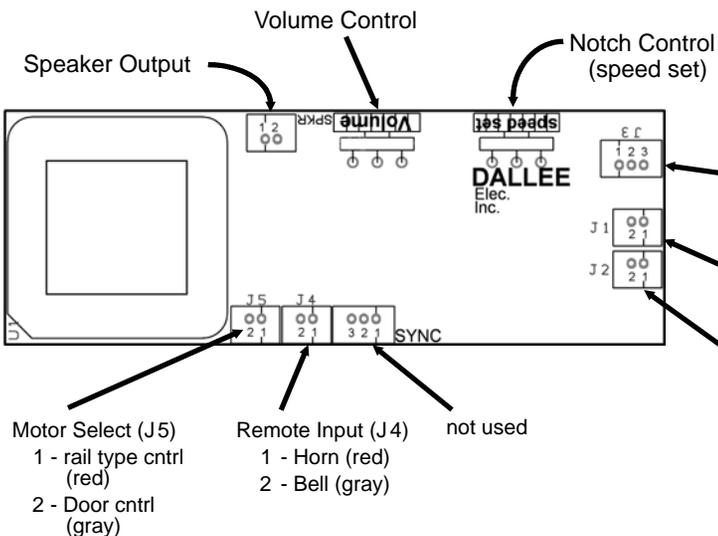

This system features an optically coupled motor input sensor. This means that any connection to J3 pins 1, 2, and 3, do not electrically connect to any other power to the board!

- J3 connections:
 1 - not used (RED)
 2 - Motor 1 (BLACK)
 3 - Motor 2 (WHITE)

- J1 connections:
 1 - Rail 1.....also AC input 1.....(RED)
 2 - Rail 2.....also AC input 2.....(GRAY)

- J2 connections:
 1 - DC power "+" (RED)
 2 - DC power "-" (GRAY)

- Motor Select (J5)
 1 - rail type cntrl (red)
 2 - Door cntrl (gray)
- Remote Input (J4)
 1 - Horn (red)
 2 - Bell (gray)
- not used

SPECIFIC INSTRUCTION SHEETS	
PAGE	INSTALLATION TYPE
3.....	Conventional DC
4.....	Conventional DC with rechargeable battery
5.....	Reed Sw/Magnet mounting
5.....	Options: solid rail / door
7.....	sample Revolution installation

Other installations / application notes can be found on our web site under "Current Product Instruction Index" then "Sound Related, misc".

Wiring standards:
 wires with a "*" ARE a connection!
 wires crossing over (without a "*") DO NOT CONNECT!


NOTE: The speaker impedance should be kept near or above 8 ohms, therefore four 8 ohm speakers in a series/parallel configuration is acceptable since it yields 8 ohms total impedance. If you care to use two 8 ohm speakers you **must** place them in **SERIES**.

DO NOT touch the speaker wires to anything else, this will damage the amplifier which is not covered under warranty!


When connecting DC power to the sound unit be absolutely sure that the "+" and "-" are connect correctly! If not, you will either burn out the sound unit or the supply feeding it. This is not covered under warranty!

DALLEE
ELECTRONICS, Inc.
 246 W. Main St.
 Leola, PA 17540
 (717) 661-7041
 www.dallee.com

Track power installation without batteries

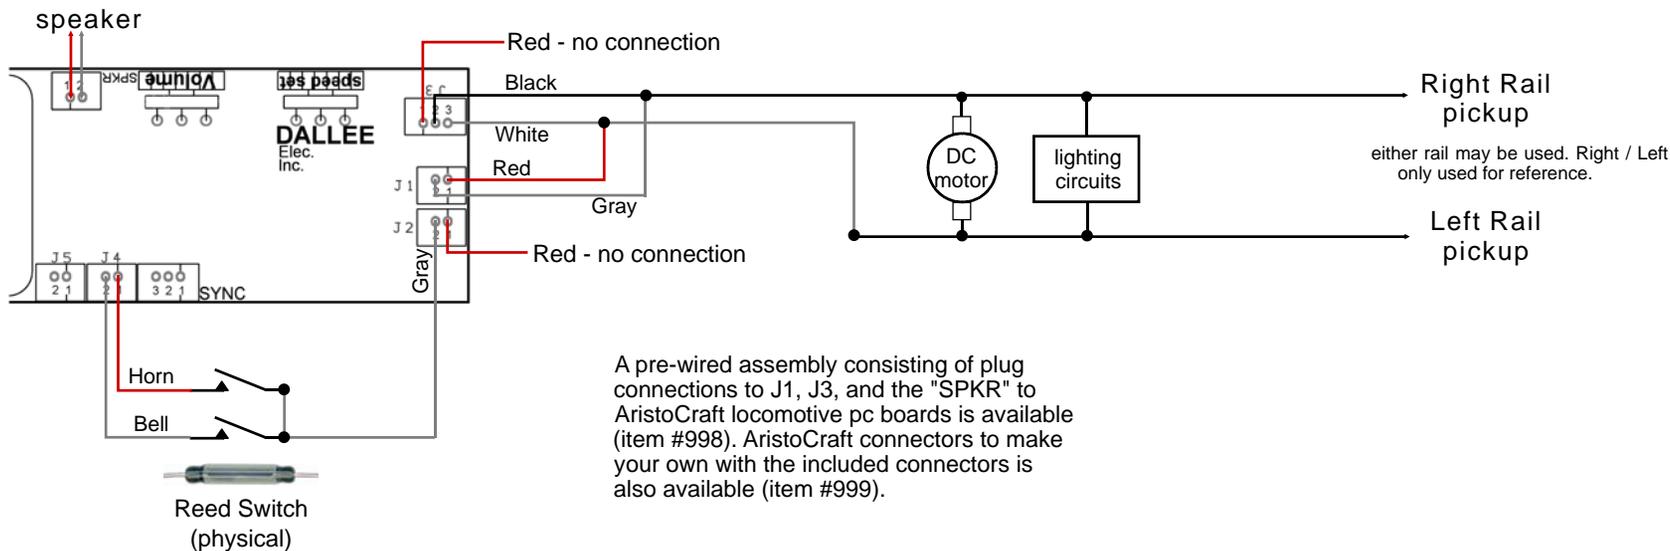


DC track power installation using standard batteries

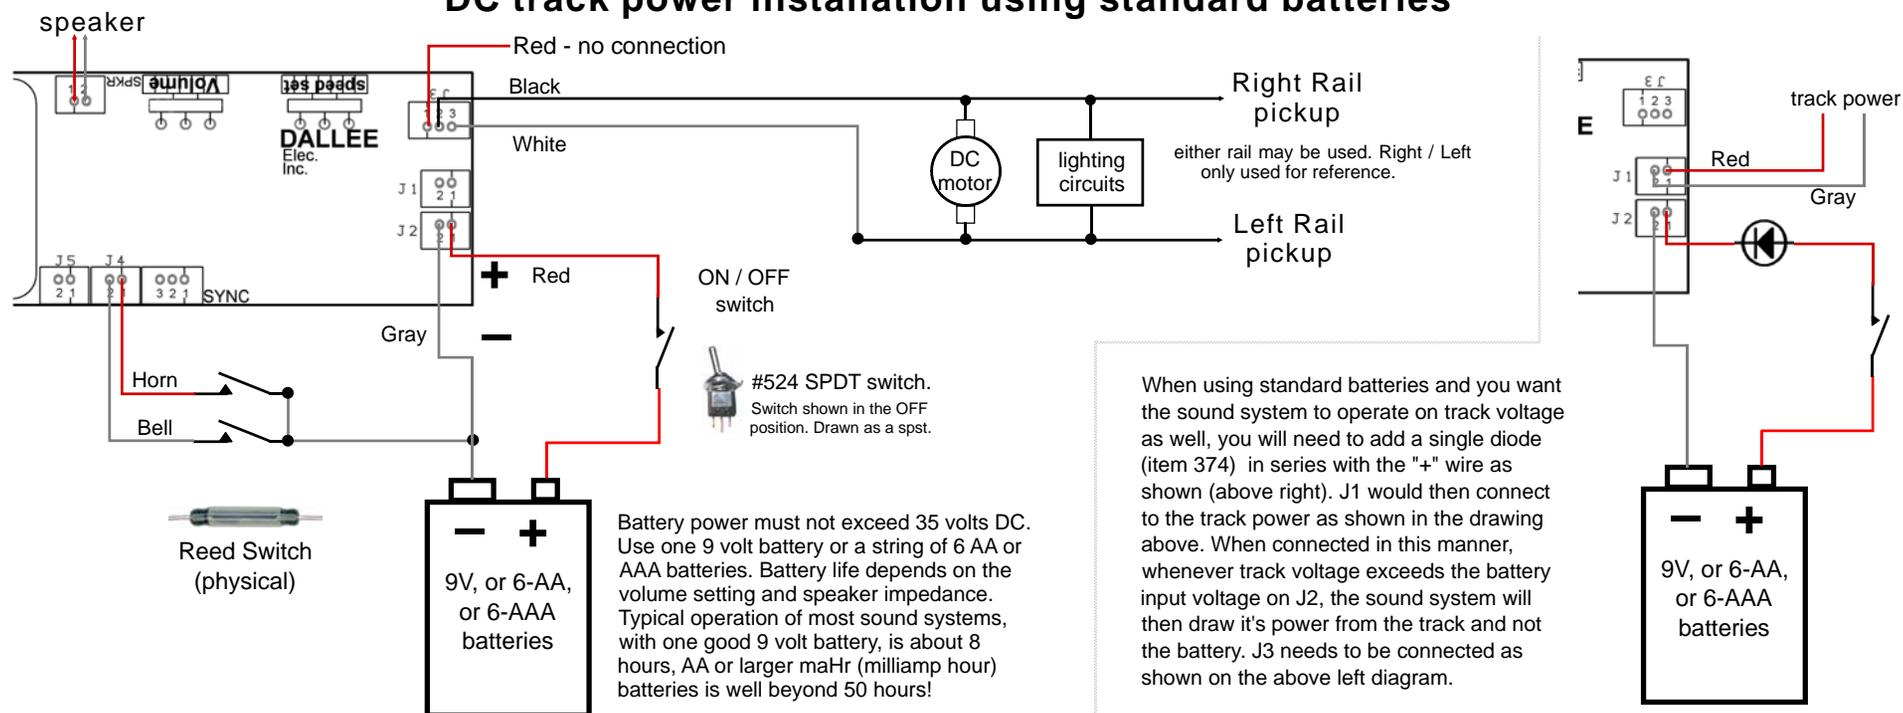


DC track power installation with rechargeable battery.

When track voltage exceeds battery voltage, the sound system will operate from track voltage instead of battery voltage.

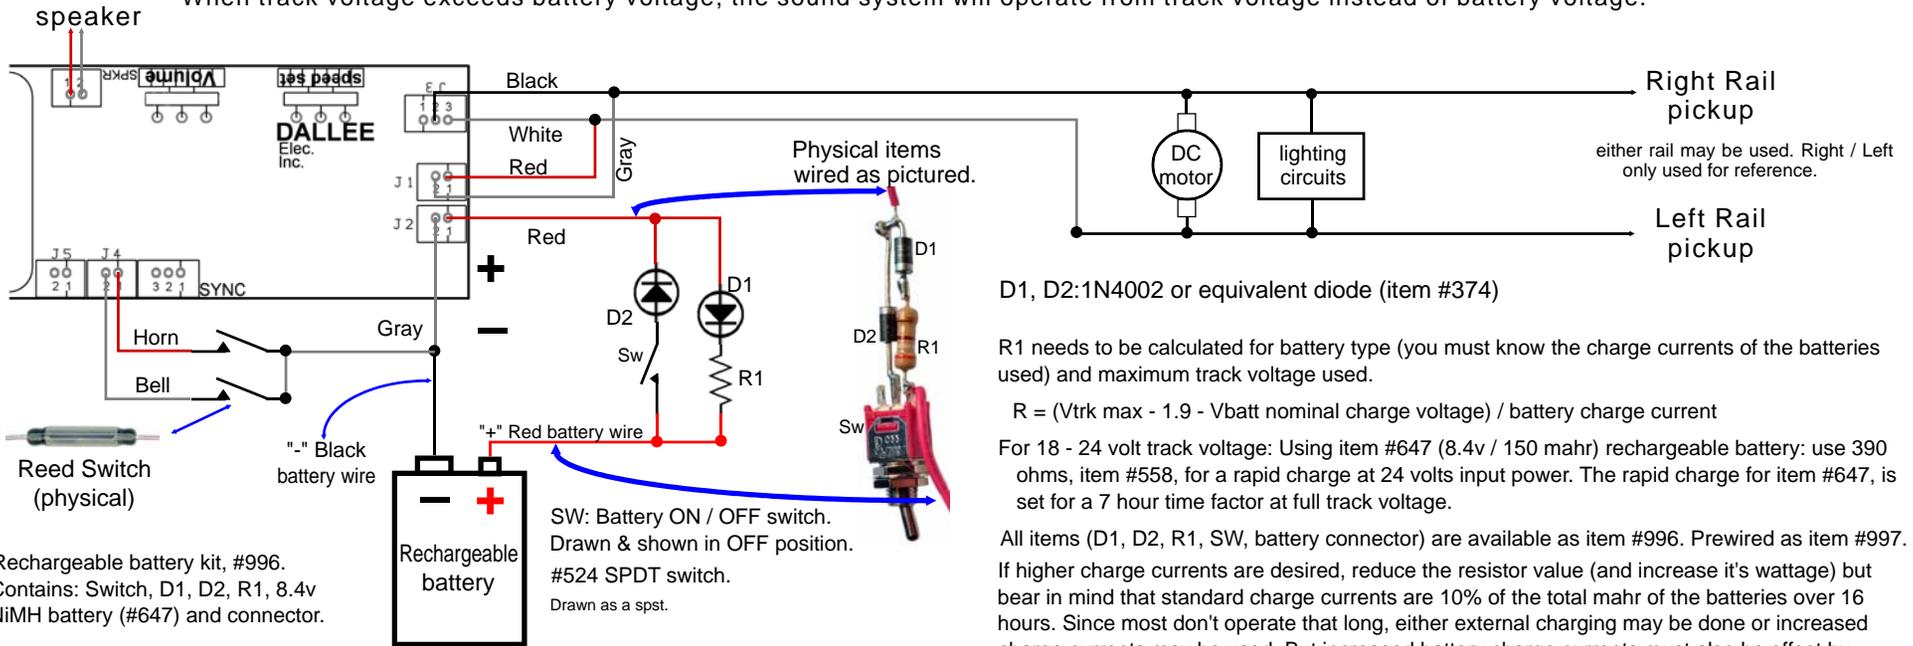

Battery power must not exceed 35 volts DC. Use one 9 volt battery or a string of 6 AA or AAA batteries. Battery life depends on the battery milliamp hour, volume setting, and speaker impedance. Typical operation of most sound systems, with one good fully charged 8.4v volt battery, is a few hours (EMD's are quite less). Higher milliamp hour batteries last well beyond 50 hours!

above with rechargeable battery & external charger connection.

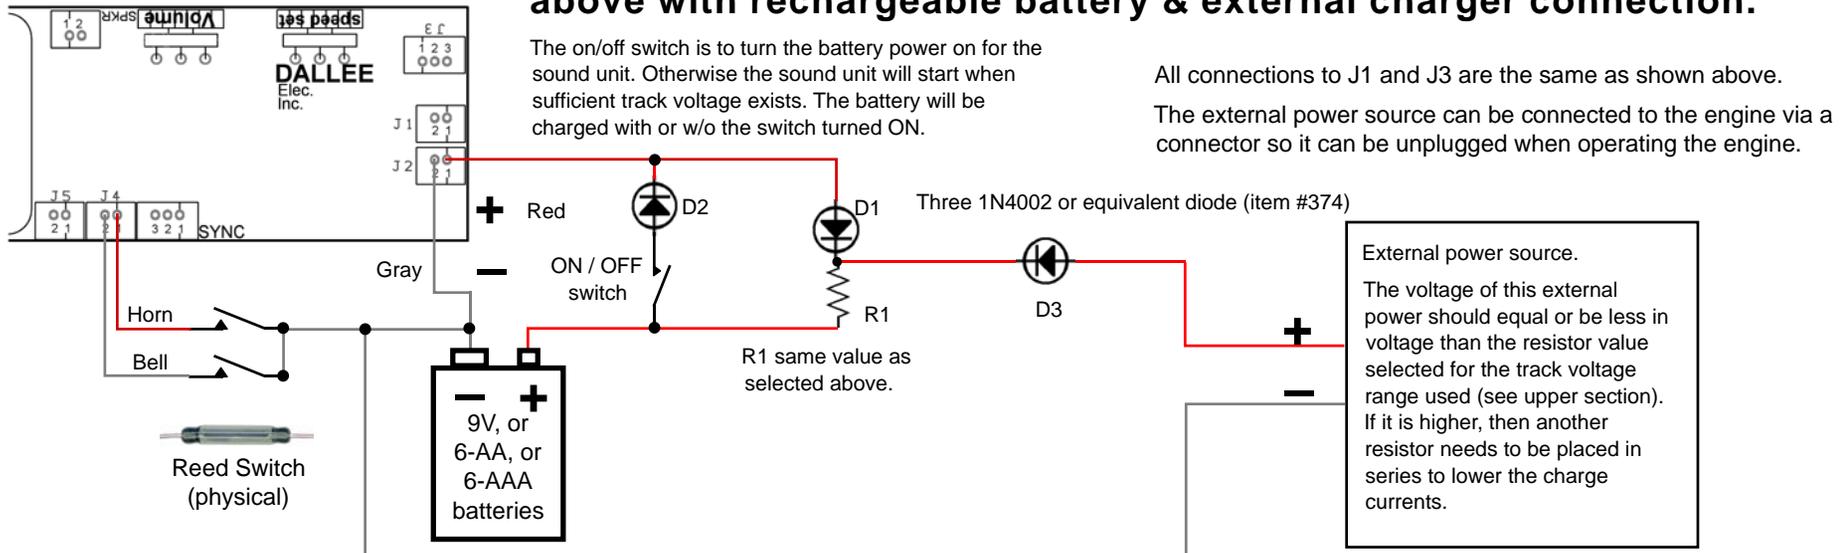

Reed switches mounted under engine or car

When operating with reed switches and magnets, it is necessary to orient the reed switch for the best sensitivity. If you need to experiment with your magnet's polarization properties, connect the reed switch to a small lamp and move the magnet about to turn the lamp on/off. This will give you a very good idea as to which way the reed switch needs to be oriented vs the magnets polarization. Reed switches can be easily mounted with double sided foam tape (item 388).

Mounting methods:

1 - Perpendicular to plane of track: The easiest to mount in most cases would be to mount the reed switch perpendicular to the track plane. By doing so, you minimize the sensitive area of the reed switch and make it more selective for what the magnet is going to operate. As can be seen in the top section of fig1 on this page. The magnets are strategically located to trigger each function. By proper locating the magnets, individual functions can be controlled.


2 - Parallel to plane of engine:

Method 1: Mount the reed switches 90° from that shown in the lower portion of fig1. Position the magnets over the end area of the reed switches. This way other rectangular magnets can be used as well. If you do not want this system to be triggered by certain rectangular magnets but do want it to activate with item 988 magnets, then orient the reed switch as shown in fig 1 and place the magnets directly under the reed switch. This way you could make the engine more specific as to which magnets will trigger the sound system.

Method 2: For use with item 988 magnets you can orient the reed switch "in line" with the locomotive. This will not yield selective operation but will allow them to operate with other magnets.


Don't forget, you do need two triggers for the bell. One to trigger the bell "on" and another further down the track, to trigger the bell "off". As shown in fig 2, you could trigger the Horn and Bell with one magnet, item 988, properly placed.

The distance between the magnet and trigger needs to be 1" or less for reliable operation. When traveling at fast speeds, and you do not get a trigger, either decrease the magnet distance or place another magnet in the line of travel.

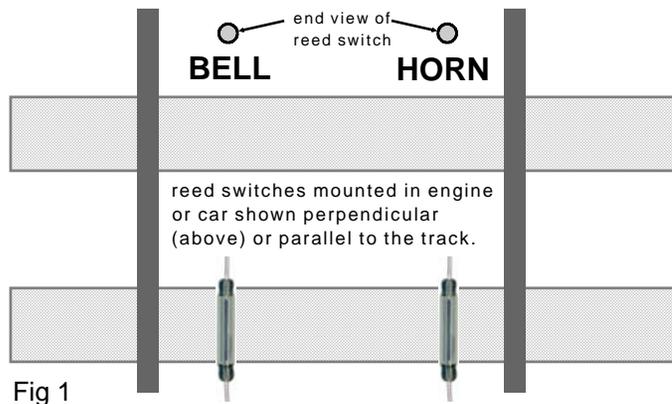


Options wiring help:

Connect all other connectors as shown. If you want to change the default play of the Sectional Rail and/or Door Sounds, add connections as shown below.

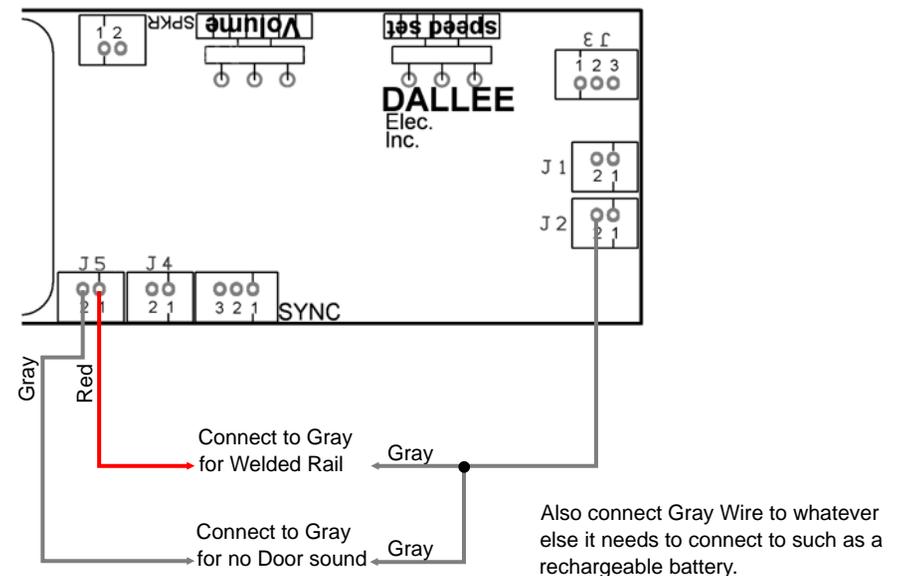


Sample Installation - AristoCraft GE shown

1 - Reed Switches - locate and prewire the reed switches as shown. Since they both connect to a common wire, only 3 wires are needed between them and the sound board.

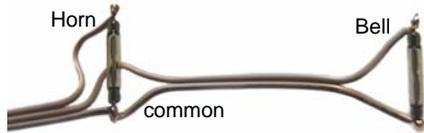


2 - Since one reed switch controls the Horn and the other controls the Bell, they need to be mounted on opposite sides of the chassis. These are shown below, attached with double sided tape (item 388), inside the fuel tanks end. To keep things consistent, use the right side of the engine for Horn activation and the left for Bell. By wiring all engines the same way, it is easy to know which side activates which function.


Note: You may want to test the activation distance for the reed switches before final assembly. Since not all reed switches are made alike, some will activate at a very low magnetic field strength and others at a higher strength. The higher strength isn't the problem as much as a lower strength. A lower strength reed switch might activate from a magnet located on the opposite side of the rail (from a far distance). This is tested by using an ohm meter to test for closure of the reed switches or by wiring to the sound system and passing a magnet for the opposite activation.

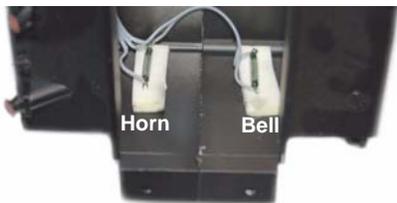


Bell Reed Switch in front of fuel tank.

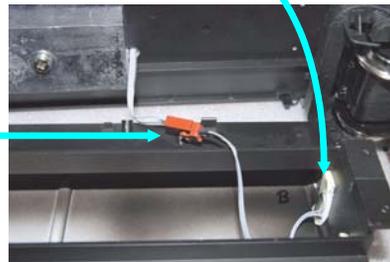

3 - for ease of disassembly, a 3 pin connector, item 521, was used between the fuel tank and bottom chassis. A hole is needed in the chassis for these wires. Make sure it is deburred properly.

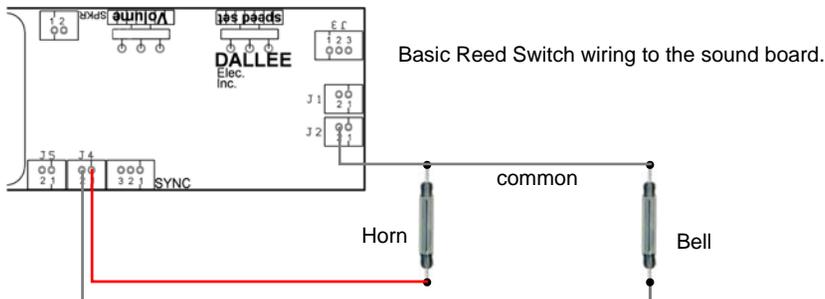

4 - A sound on/off switch (item 524) can be easily mounted by drilling a small hole in the shell as shown. Place it in the same direction as the other switches. This way the "ON" position will be easily known.

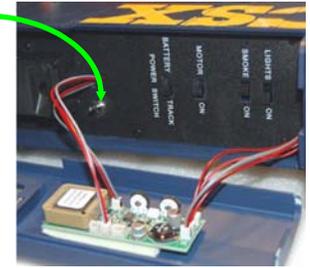


5 - as can be seen above, the sound board is easily mounted in the switch access roof panel. It not only clears all of the other switches when mounting this way, but access to the volume and notch setting controls are easily accomplished. As can be seen, all wires to the sound board pass through the existing openings.

6 - connecting J3, the motor input sense wires. In this application, we decided to utilize the motor switch that already exists instead of wiring the motor leads (white and black wires from J3) directly to the track power pickups. By wiring this way, when the motor switch is set to the "OFF" position, the sound systems prime mover will merely sit at idle when the track is powered instead of ramping up/down to the applied track power. This makes for a more realistic installation so that the engine can sit fully illuminated, or not, with the sounds running at idle. You can also leave track power on to fully charge the battery if necessary without running the locomotive. If you don't care to hear the sounds, merely turn the volume control fully CCW.

J3 pin 3, White wire connects to the other motor/track power lead which is the same as the red motor wire or Sound Power as shown. J1, pin 1, also connects to this point.

J3 pin 2, Black wire.

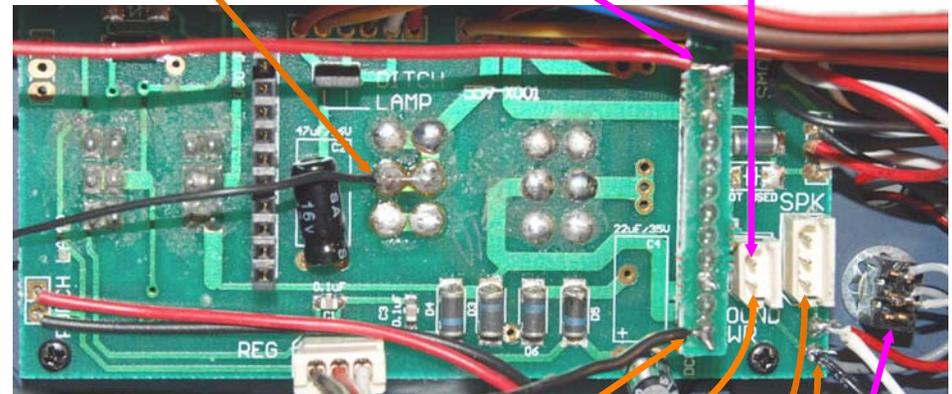

7 - Connect the other track power wire (shown as a black wire). As shown, this is the other track power wire. The sound unit's J1, pin 2 connects to this point or to the "SOUND PWR" connector.


backside of ON/Off switch, item# 524

8 - either carefully solder speaker connector wires from the sound system's connector to the main pcb or the existing speaker. Or utilize the "SPK" connector to connect the speaker wires.

Plugs with wires for the two AristoCraft connectors are available, item #999 (ART-29608).

Aristocraft/Crest #CRE-57000 Revolution Receiver (2.4 GHz) installation.

Auto-Horn Sound System

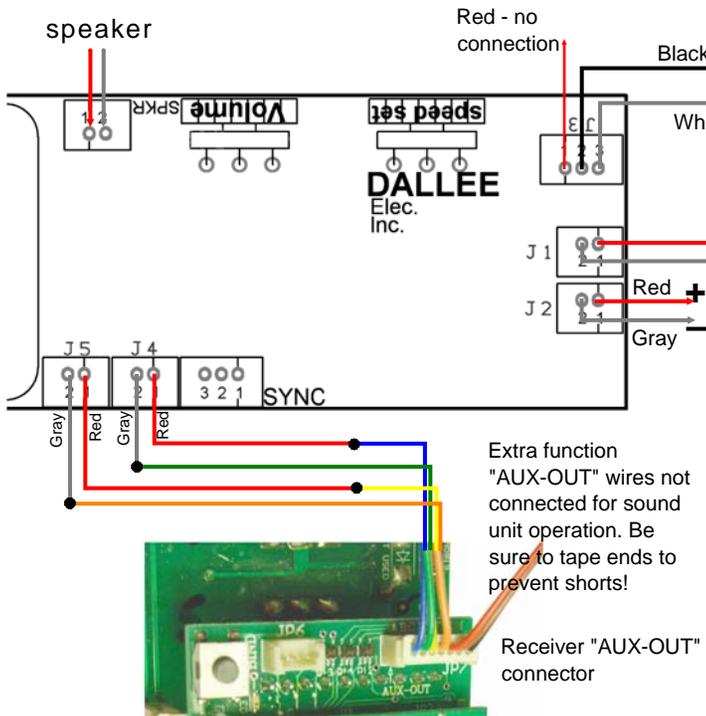

AristoCraft boards labeled "SOUND PWR" are actually connected to the "Motor Power" before the motor "On/Off" switch. While they can be connected to this connector, it is not ideal since the motor switch does not disconnect this connection when the motor power is switched off. Connect these two wires to either the motor power leads or the "Sound Pwr" connector wires. This is the same that goes to the motor. The "Sound Power" should come from the track or battery and not the motor in this application. See wiring example on lower part of this page.

Diesel sound: This connection tells the sound system what speed / RPM to operate the diesel's prime mover sound.

Steam sound: This connection tells the sound system what rate to operate the auto-chuff. If you are using the "SYNC" input, don't connect anything to J3!

J1: Track Input Power.

Input voltage of 7 to 24 volts DC or AC. Absolute maximum input is 35 volts DC!

Connect to the track input from each truck, detailed picture shown below for AristoCraft engines. Remember that track powered units will not operate properly until the track power is at least above 6 volts. Amplifier's require a minimum of 12 volts DC to operate!

Your receiver battery power may be the same power as the sound system and amplifier (if present). If you have a different battery for the receiver and sound system, then you should connect the "-" of each battery system together.

J2: DC power input/output.

This is the rectified power from the sound system. When operating on DC track power, since the polarity is unknown, the input power must be connected to J1 input power.

The J2 power is an input for the sound system as well as a DC power output when J1 is the input power. It can be used to power our 11 or 22 watt amplifier's (item 671, 672). The DC output is limited and is not intended to operate other items.

If you purchased the "Auto-Horn" or "Auto-Whistle" type sound units, you will not have enough 2 pin connectors to utilize both J2 and J5. Normally this is not a problem since J2 is normally not connected. Extra wire harnesses can be purchased if needed.

Sound Function	Keypad	Wire Clr	Std	Auto
J4-1 - Whistle/Horn	A	Blue	M	M
J4-2 - Bell	B	Green	L	M
J5-1 - Rail Click's	C	Yellow	L	L
J5-2 - Doors	D	Orange	L	L


you may elect to connect all, some, or none.

Std: Standard DC type sound unit. These allow the Horn/Whistle to be played on demand.

Auto: Auto-Horn/Whistle unit. These units play Horn/Whistle patterns each time they are triggered.

M: Momentary L: Latching

Mother Board w/o receiver:

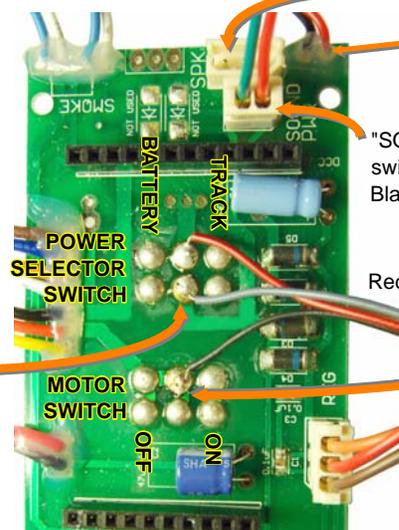

"SPK" : Speaker connector. Connect to Sound units "SPKR" connector wires.

If you did not purchase connectors, cut or splice the Red & Gray wires that connect to the "SPKR" socket to the Red & Black wires from the main board. Either wire nut or solder and tape / heat shrink tube the connection.

"SOUND PWR" connector is internally connected to the motor power before the Motor ON/OFF switch. Therefore if you use the Red & Green wires from this and connect them to the J3 White & Black wires, the sound unit will ramp up/down with speed setting changes w/o the motor running when the MOTOR switch is set to the OFF position. To prevent this from happening, solder the Black J3 wire as shown to the middle of the MOTOR switch and the "SOUND PWR" Green wire to the White J3 wire (cut or tape the Red "SOUND PWR" wire since it is not used). By doing so, when the motor power switch is turned OFF the sound system will produce idle sounds.

Remember, if this is a steam sound unit and you are intending to synchronize the chuff sound, don't connect the J3 black & white wires to this board. They get connected to the synchronization device and to the "SYNC" connector and not J3! Only older software units require both J3 and the SYNC connector to be used.

J1: "Sound Power" connection.
As shown, solder the red & gray wires to the center of the "Battery / Track" power selector switch. This connects to J1 of the sound system and is the best selection to power the sound unit since polarity is not important. This is also true when operating the sound unit w/o a receiver as well.