

Sample installation - Weaver RS-3

Metal exhaust grill used as speaker grill.



Mounting optional oval speaker (item #662) requires using an etched metal grill. By mounting the speaker facing up, better sound is produced. Simply drill out the existing molded plastic grill (leaving a lip to glue the metal grill) and glue the metal grill in place. Then carefully align the oval speaker and either glue or hot melt it in place. Be sure to encase the entire rear surface so that no sound can be transmitted about the speaker edges! A note of caution, make sure that the light lens can be placed in and out before securing the speaker too far forward.


Placing the miniature 5 volt lights into the existing lenses is quite easy. If the existing lenses have become melted, replacements are available from Weaver Models. Dabs of hot melt, or tape, can be used to secure the wires to the plastic shell.

When mounting the Locomatic™ unit in the chassis you must remove the weight. Care must be taken so that it sits above the truck screw. Extra 1/8" double sided foam tape is available, item #388, for this and other purposes. The unit must also be mounted almost flush to the first two molded sprues. The motor must be rotated and secured so that the brush connections can not come in contact with the board.

The metal grill and windows are available from:


P&D Hobby Shop
31902 Groesbeck
Fraser, MI 48026
Ph: (810) 296-6116

Strobe

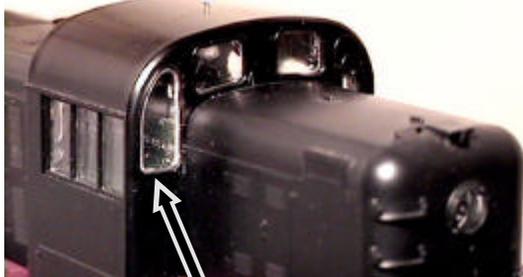


Windows

Inside shell - grill installed.

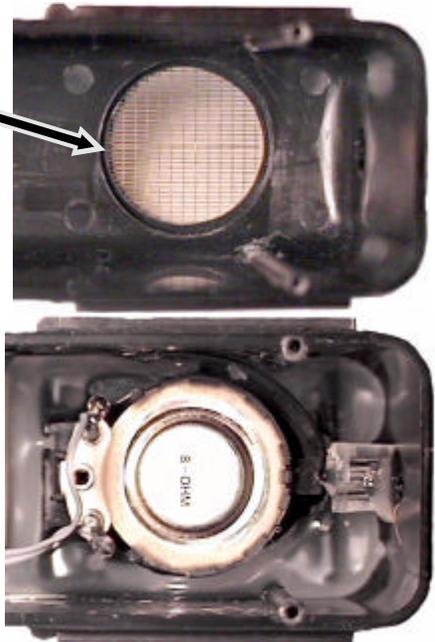

Speaker and light installed.

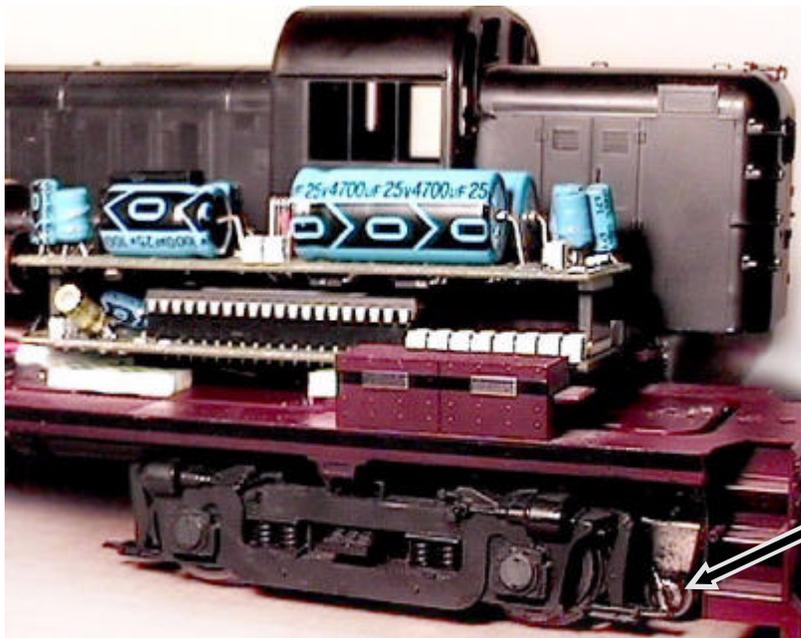

For best operation, secure center roller pickup to the roller's pin. Do this on both pickups. File the side of the pin to allow the Rosin core solder to quickly clean and allow the solder to flow without melting the plastic support.

Weaver does make a new double roller. You should replace this roller with a double roller on each truck.